

GRB-I26

Embedded Industrial PC




Features

- Intel LGA1700, CPU 12/13/14 gen 2*SO-DIMM DDR5 to 128 GB
- 3 x VGA, HDMI, DP. 3*GbE LAN option 6*LAN
- 6*COM (option 8*COM)
- 9~36V DC power input

Specification

CPU	Intel® 12-14th generation Core™ i3/ i5/ i7 Series CPU with -T/-TE Q670 chipset AMI UEFI BIOS TDP 35W/65W
RAM	Dual channel DDR5 4800Mhz Max capacity 64Gb Socket 2xSO-DIMM 288Pin
Graphics	Intel UHD Graphics for Intel CPU 12th/13th/14th Gen H.265, DirectX 12/12.1(L SKU), OpenGL 4.5/4.6(L SKU), OpenCL 3/2.1 (E SKU)
Storage	2*2.5" for SSD/HDD 2*M.2 2280 M-Key SATA3.0
Expansion	M.2 (E Key): 1*M.2 2230 support Wi-Fi (Support both CNVi and PCIe protocol) M.2 (B Key): 1*M.2 3052 B-Key support 4G/5G
Ethernet	3*RJ45: -> GbE LAN1-2: Intel I210 GbE; LAN3: Intel I219 GbE LAN 10/100/1000 Mbps 6*RJ45: -> GbE LAN1-2,4,5,6: Intel I210 GbE; LAN3: Intel I219 GbE LAN 10/100/1000 Mbps
Display	1*VGA, 1*HDMI, 1*DP
USB	6*USB3.0 2*USB2.0
COM	6*COM: -> COM1: RS-232/422/485, COM2&6: RS-232, COM 3~5: RS-232/485 8*COM: -> COM1: RS-232/422/485, COM2: RS-232, COM 3~8: RS-232/485
Audio	Line-out, Mic-in
Other	Wire switch
OS	Win 10, Win 11 Centos 8, Ubuntu 20.04/22.04/24.04, Linux.
Power In	9-36V DC-IN
Dimensions	220 x 226 x 75 mm (L x W x H)
Environment	Operating Temp: -25 ~ 60 °C Storage Temp: -40 ~ 85 °C

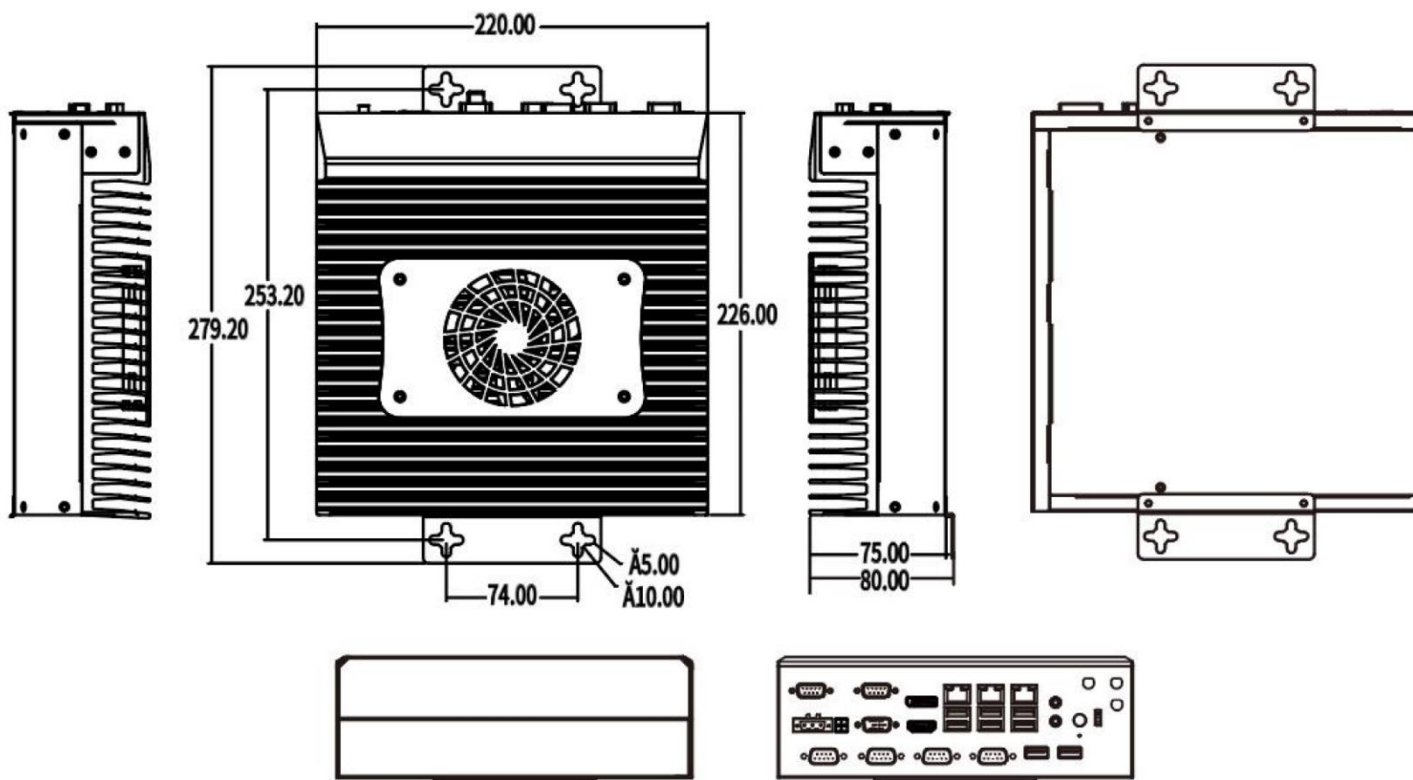

Ordering info

Number	Description	Packing list	Option
GRB-I26-3L6C	Fanless BoxPC 8*USB, 3*LAN, 6*COM 1*VGA, 1*HDMI, 1*DP 9-36V DC	- fanless PC - power unit - 1m - mount	- power unit - 4G, BT, WiFi - video cables - SATA - SATA power
GRB-I26-6L8C	Fanless BoxPC 8*USB, 6*LAN, 8*COM 1*VGA, 1*HDMI, 1*DP 9-36V DC		